

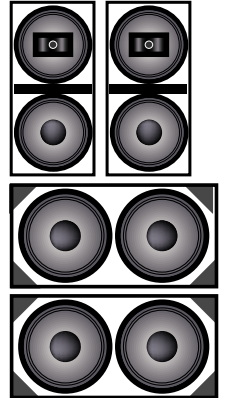




Package Systems

F/HS.1 Front of House System (covers 1800-2500 people)

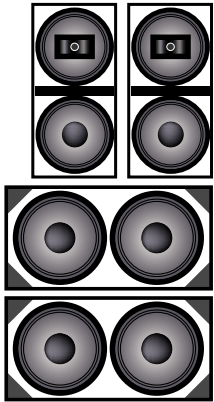

- 4 x RS-2.2 Dual 15" Coaxial Loudspeaker System w/ 2" Drivers**
- 4 x MF-218 Compact, Multi-Functional, Dual 18" Subwoofer System**
- 2 x PAS 3.2 3000 watt Professional Touring Amplifier**
- 1 x PAS 1.1 1100 watt Professional Touring Amplifier**
- 1 x PAS TOC™ R2 Signal Processor**
- 1 x PAS Baltic Birch 16u Amp Rack w/ wheels & custom output panels**
- 4 X 50' Speakon to Speakon 12 ga Speaker Cables**
- 4 X 3' Speakon to Speakon 12 ga Speaker Cables**

TOC RS-1.2 Specs

Frequency Response: 40 Hz to 16 kHz
 Power Handling (cont. program): 800 Watts
 Nominal Impedance: 4 ohms
 Sensitivity (1w/1m): 100 dB
 Maximum SPL: 128 dB @ 1 meter
 Nominal Dispersion: 60° H x 40° V, above 2 kHz
 Crossover Frequency: 1.2 kHz
 Coaxial Driver: CX-2580C
 HF Driver: DE 750/8
 LF Driver: HL-1580C
 Input Connectors: 2xNL4
 Dimension: 35.35" H x 17.25" W x 24" D
 Weight: 128 lbs

TOC MF-218 Specs

Frequency Response: 32 Hz to 300 Hz
 Power Handling (cont. program): 1200 Watts
 Nominal Impedance: 4 ohms
 Sensitivity (1w/1m): 102 dB
 Maximum SPL: 129 dB @ 1 meter
 LF Driver: LX-2800
 Input Connectors: 2xNL4
 Dimension: 42" H x 21" W x 24" D
 Weight: 150 lbs

PAS 3.2 Power Amplifier Specs

Frequency Response: 20 Hz to 20 kHz
 Output/Channel:
 850 watts/channel @ 8ohms
 1500 watts/channel @ 4 ohms
 2200 watts/channel @ 2 ohms
 3000 watts/channel @ 8 ohms bridged
 4400 watts/channel @ 4 ohms bridged
 Gain: 39 dB
 Input Sensitivity: 1.0V RMS for rated output
 Distortion: = 0.1% THD or IM, 0.01W to rated output
 Hum & Noise: 101 dB below rated output
 Input Connectors: XLR female + 1/4" TRS Jacks
 Output Connectors: Neutrick Speakon
 Weight: 62 lbs

The PAS FOH-1 is a fully integrated sound system for Front of House sound reinforcement applications. It features four MF-218 dual 18" subwoofers and four RS-2.2 dual 15" coaxial enclosures. Two PAS 3.2 3000-watt amplifiers and one PAS 1.1 1100-watt amplifier are included to drive the system, while a 16 space amp rack with pre-wired I/O panel is provided to house the amplifiers and a PAS TOC™ R2 signal processor. The R2 processor is an analog signal processor designed specifically for use with the RS-2.2 and provides the system with precision equalization, higher output, greater reliability, and the "ideal phase response" characteristic of all PAS TOC™ products. Also included are all the cables needed to hook up the system, while custom caster pallets are available as an option package.

PAS 1.1 Power Amplifier Specs

Frequency Response: 20 Hz to 20 kHz
 Output/Channel:
 500 watts/channel @ 8ohms
 800 watts/channel @ 4 ohms
 1050 watts/channel @ 2 ohms
 1300 watts/channel @ 8 ohms bridged
 1650 watts/channel @ 4 ohms bridged
 Gain: 36 dB
 Input Sensitivity: 1.0V RMS for rated output
 Distortion: = 0.1% THD or IM, 0.01W to rated output
 Hum & Noise: 101 dB below rated output
 Input Connectors: XLR female + 1/4" TRS Jacks
 Output Connectors: Neutrick Speakon
 Weight: 39 lbs



2270 Cosmos Court, Carlsbad, CA, U.S.A. 92009

Professional Voice (760) 431-9924 Fax (760) 431-9496
 Audio Systems website: www.pas-toc.com e-mail: info@pas-toc.com

The Next Phase In Loudspeaker Technology™