




Package Systems

Basic House of Worship FOH System

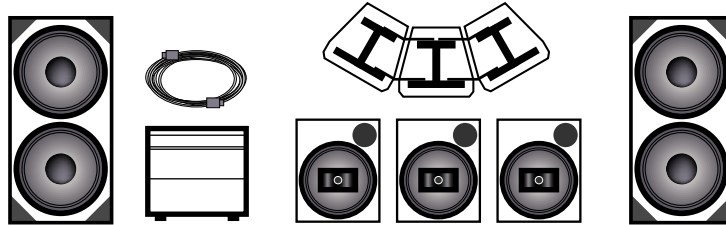

- 3 x FT-1.2 Single 15" Coaxial Loudspeaker system w/ 2" Driver**
- 2 x MF-218 Compact, Multi-Functional, Dual 18" Subwoofer System**
- 1 x PAS 3.3 3000-watt, 3-Channel Amplifier**
- 1 x PAS Baltic Birch 8u Studio Amp Rack w/ custom I/O panel**
- 3 X 150' Speakon to Speakon 12-ga Speaker Cables**
- 2 X 50' Speakon to Speakon 12-ga Speaker Cables**
- 3 X White Flying Truss Hardware**

The Basic HOW front of house package is a fully integrated system designed for installations in small to medium sized House of Worship facilities. This "Plug and Play" system features an all white texture coat finish and includes truss hardware for convenient and safe installation. Featuring 3,000-watts of power, this system is designed to provide optimal performance through the use of TOC™ passive dividing networks, which insures "ideal phase response." This virtually eliminates the need for further equalization, making it perfect for applications where a full-time sound engineer is not available.

TOC FT-1.2 Specs

Frequency Response: 50 Hz to 16 kHz
Power Handling: 400 Watts
Nominal Impedance: 8 ohms
Sensitivity (1w/1m): 100 dB
Maximum SPL: 125 dB @ 1 meter
Nominal Dispersion: 60° H x 40° V, above 2 kHz
Crossover Frequency: 1.2 kHz
LF Driver: CXL-2580C
HF Driver: DE 750/8
Input Connectors: 2xNL4
Dimension: 21.25" H x 17.25" W x 17" D
Weight: 76 lbs

TOC MF-218 Specs

Frequency Response: 32 Hz to 300 Hz
Power Handling: 1200 Watts
Nominal Impedance: 4 ohms
Sensitivity (1w/1m): 102 dB
Maximum SPL: 129 dB @ 1 meter
LF Driver: LX-2800
Input Connectors: 2xNL4
Dimension: 42" H x 21" W x 24" D
Weight: 150 lbs

PAS 3.3 Power Amplifier Specs

Frequency Response: 20 Hz to 20 kHz
Output/Channel:
Channels 1 & 2 - 500 @ 8 ohms, 800 @ 4 ohms
Channel 3 - 2000 @ 2 ohms
Gain: 33 dB Channel 1 & 2, 36 dB Channel 3
Input Sensitivity: 1.0V RMS for rated output
Distortion: = 0.1% THD or IM, 0.01W to rated output
Hum & Noise: 101 dB below rated output
Input Connectors: XLR female + 1/4" TRS Jacks
Output Connectors: Neutrick Speakon
Weight: 65 lbs



2270 Cosmos Court, Carlsbad, CA, U.S.A. 92009
Professional Voice (760) 431-9924 Fax (760) 431-9496
Audio Systems website: www.pas-toc.com e-mail: info@pas-toc.com

The Next Phase In Loudspeaker Technology™